

DS-1H18S/E(C) HD Video Balun



Features and Functions


- 1 channel passive video UTP balun
- Pat press type terminal on top, clasp aside.
- Support device camera/DVR with POC
- Real-time transmit video signal, and high quality and stable video
- Compatible with HDCVI/TVI/AHD/CVBS
- Transmission distance: non-POC Camera Max. 250m; POC Camera Max. 150m.
- Superior anti-interference



Specifications

Model		DS-1H18S/E(C)
Properties	Transmission Signal	1 channel
	Transmission Distance	Non-POC Camera: Max 250m POC Camera: Max 150m
	Category Type	UTP CAT5/ 5E/ 6 (R<10Ω/100 M)
Video Transmission Properties and Port	Coaxial Video Connector	BNC-M
	Twisted-pair Video Connector	Pat Push Interface
	Compatible Format	HDCVI/TVI/AHD/CVBS
	Resolution	720P/1080P/4MP/5MP/8MP
	Ant-interference	>60db
Protection	ESD	contact discharge electricity level3
		air discharge electricity level3
		Per: IEC61000-4-2
	Coaxial Cable Connector	2KV(common-code) Per:IEC61000-4-5
UTP Cable Connector	2KV(different-code), 2KV(common-code) Per:IEC61000-4-5	
Impedance	BNC Male	75 ohms
	UTP Cable	100 ohms
Physical Properties	Shell	ABS
	Color	Black
	Dimensions (L x W x H)	150mm x 20mmx 22mm (balun with cable) 50mm x 20mmx 22mm (balun without cable)
	Weight	32 g
Stability	MTBF	>10000 h
Environmental	Operating Temperature	-10-55°C
	Storage Temperature	-20-70°C
	Humidity	0-95% (non-condensing)

Typical Application

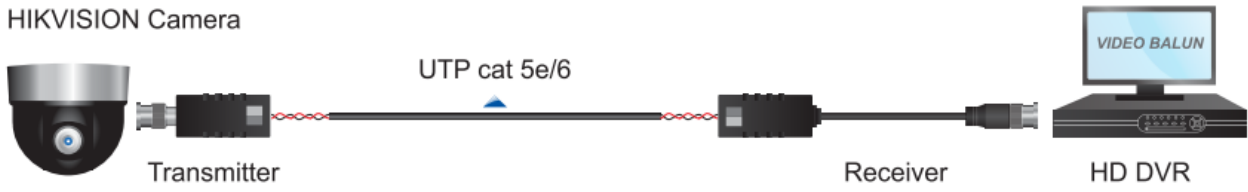

Available Model

Distributed by

DS-1H18S/E(C)

L ┘