


## Central Loose Tube Aerial Self Supported, G.652D, FRP, PE

### Cable Design

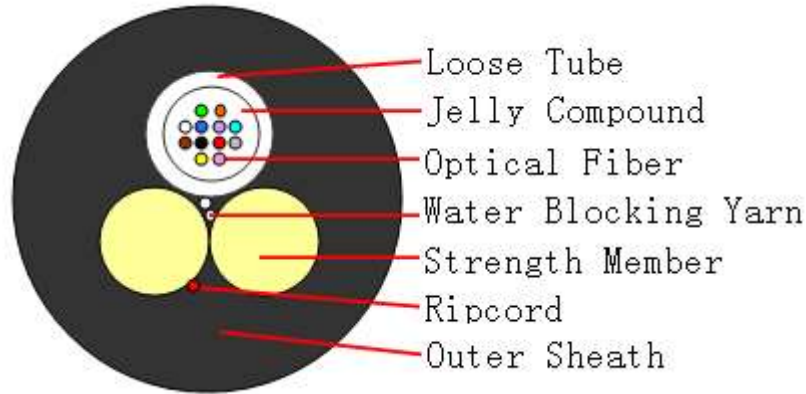

### Technical data

No. of cable		2~6	8~12
Span		80m	
Fiber Model		G.652D	
Loose Tube	Material	PBT	
	Diameter	1.5±0.1 mm	2.0±0.1 mm
	Thickness	0.25±0.05 mm	0.32±0.05 mm
	NO.	1	
	Color	Natural	
Strength Member	Material	FRP	
	Diameter	1.5±0.05 mm	
	NO.	2	2
Water Blocking	Material	Water Blocking Yarn	
Rip Cord	Material	Nylon	
	NO.	1	
Outer Sheath	Material	PE	
	Color	Black	
Cable Diameter		6.8±0.2 mm	
Cable Weight		39±5.0 kg/km	
Allowable Tensile Strength		2000N	
Allowable Crush Resistance		2200N/100mm	
Min. bending radius	Without Tension	12.5×Cable- φ	
	Under Maximum Tension	25.0×Cable- φ	
Temperature range (°C)	Installation	-20~+60	
	Transport & Storage	-40~+70	
	Operation	-40~+70	

### Fibre Color

No.	1	2	3	4	5	6
Color	Blue	Orange	Green	Brown	Gray	White
No.	7	8	9	10	11	12
Color	Red	Black	Yellow	Violet	Pink	Aqua

### The properties of single mode optical fiber (ITU-T Rec. G.652.D)

Item	Specification
Fiber type	Single mode
Fiber material	Doped silica
Attenuation coefficient	
@ 1310 nm	≤ 0.35 dB/km
@ 1383 nm	≤ 0.32 dB/km
@ 1550 nm	≤ 0.21 dB/km
@ 1625 nm	≤ 0.25 dB/km
Point discontinuity	≤ 0.05 dB
Cable cut-off wavelength	≤ 1260 nm
Zero-dispersion wavelength	1300 ~ 1324 nm
Zero-dispersion slope	≤ 0.092 ps/(nm <sup>2</sup> .km)
Chromatic dispersion	
@ 1288 ~ 1339 nm	≤ 3.5 ps/(nm. km)
@ 1271 ~ 1360 nm	≤ 5.3 ps/(nm. km)
@ 1550 nm	≤ 18 ps/(nm. km)
@ 1625 nm	≤ 22 ps/(nm. km)
PMD <sub>Q</sub> (Quadrature average*)	≤ 0.2 ps/km <sup>1/2</sup>
Mode field diameter @ 1310 nm	9.2±0.4 μm
Core / Clad concentricity error	≤ 0.5 μm
Cladding diameter	125.0 ± 0.7 μm
Cladding non-circularity	≤ 1.0%
Primary coating diameter	245 ± 10 μm
Proof test level	100 kpsi (=0.69 Gpa), 1%
Temperature dependence 0°C ~ +70°C @ 1310 & 1550nm	≤ 0.1 dB/km

### Mechanical And Thermal Performances

Item	Test Method	Acceptance Condition
Tensile Strength IEC 60794-1-2-E1	- Load: 2000N - Length of cable: about 50m	- Loss change ≤ 0.1 dB @1550 nm - No fiber break and no sheath damage.
Crush Test	- Load: 2000N/100mm	- Loss change ≤ 0.1dB@1550nm

IEC 60794-1-2-E3	- Load time: 1min	- No fiber break and no sheath damage.
Impact Test IEC 60794-1-2-E4	- Points of impact: 3 - Times of per point: 1 - Impact energy: 5J	- Loss change $\leq 0.1\text{dB}@1550\text{nm}$ - No fiber break and no sheath damage.
Temperature Cycling Test IEC60794-1-22-F1	- Temperature step: +20°C → -40°C → +70°C → +20°C - Time per each step: 12 hrs - Number of cycle: 2	- Loss change $\leq 0.1 \text{ dB/km}@1550 \text{ nm}$ - No fiber break and no sheath damage.

### Sheath marking

The optical fiber drop cable shall have sequentially numbered length marking at intervals of approximately 1 meter. The starting number of ordering length for any coil shall begin with zero meter. The accuracy of the measurement of length marking shall be held within the limits of  $\pm 1\%$ .

- a) Manufacturer's name
- b) Type of wire
- c) Year and month of manufacture
- d) Length marking each meter along the wire