


AW-FP100IP is a communication port device, using Cortex-M7 scheme, The main frequency is up to 400MHz, with stronger performance, faster transmission speed and higher reliability.


Asenware graphical monitoring software can be used through an external network cable.

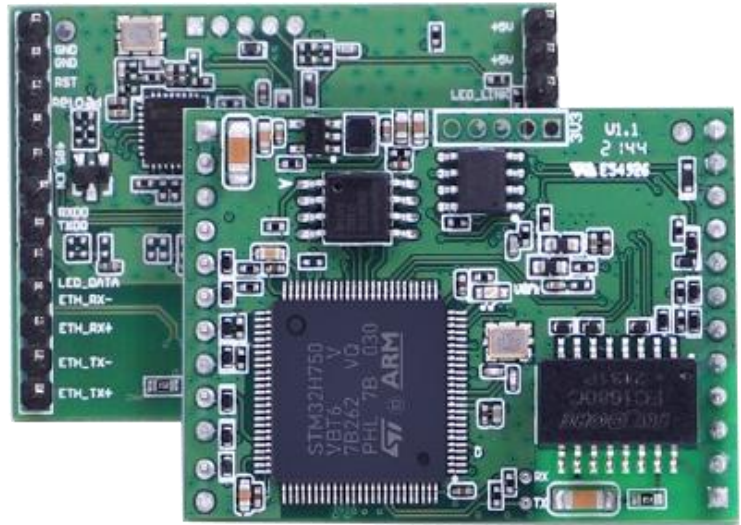

Features

- ✓ Support account and password login
- ✓ Industrial temperature range
- ✓ Pin-type design, easy to install

Installation

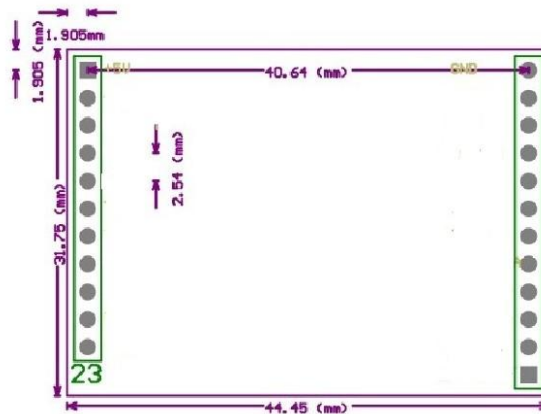

Technical Specification

Model	AW-FP100IP
Operating Voltage	4.75~5.5 VDC(5.0V Best)
Operating Current	175 mA @ 5.0 VDC
Network port specifications	RJ45、10/100 Mbps
Environmental	Working Temperature range: -40 to 85°C Working Humidity: 5 to 95% RH, non-condensing
Size (L*W*H)	44.5*31*15.4mm