


## LINE-INTERACTIVE(PWM OUTPUT)




- 1 CPU controlled  
Auto re-starts when AC recovers
- 2 Silence setup  
Automatic charging  
(offline charging)
- 3 Battery low voltage protection
- 4 Overload short circuit protection
- 5 Wide input voltage range

## PRODUCT INTRODUCTION

- 1 ON/OFF switch
- 2 Input voltage
- 3 Output voltage
- 4 Load level
- 5 Battery capacity
- 6 UPS fault
- 7 Overload

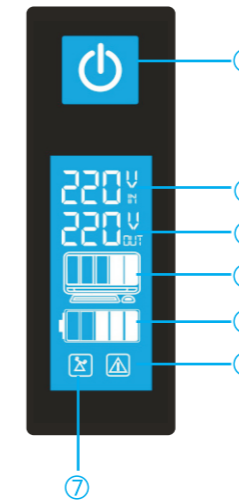

- 1 ON/OFF switch
- 2 AC / Backup status  
(In AC mode, led continuous bright, in backup mode, led flashes every 8 seconds)
- 3 Battery / Load status  
(When the UPS is in AC mode, shortly press the switch then led continuous bright, the battery led 4 indicate the percentage of load; press the switch again, this led off, the battery led 4 indicate the percentage of battery capacity.)

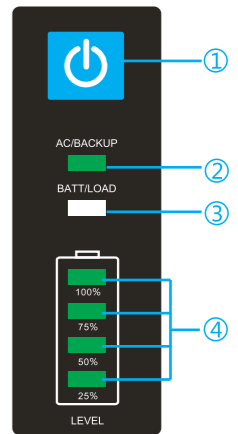

- 4 Battery capacity / Load level indicator

## SPECIFICATIONS

MODEL	600	1000	1200	1500	2000	3000
Capacity	600VA/360W	1000VA/500W	1200VA/720W	1500VA/900W	2000VA/1200W	3000VA/1800W
<b>INPUT</b>						
Input voltage	110/120VAC or 220/230/240VAC					
Input voltage range	85~150VAC/145~290VAC			85~145VAC/175~275VAC		
Frequency range	45~65Hz					
<b>OUTPUT</b>						
Output voltage	110/120VAC or 220/230/240VAC					
Output voltage range	102~132VAC/200~255VAC			102~132VAC/200~240VAC		
Output frequency	60±0.5Hz or 50±0.5Hz (Auto sensing)					
Output wave form	PWM (Batt. mode)					
Transfer time	Typical 2-6ms,10ms max					
<b>BATTERY</b>						
QTY. & capacity of battery	12V/7AHX1pc	12V/9AHX1pc	12V/7AHX2pcs	12V/9AHX2pcs	12V/9AHX2pcs	12V/9AHX4pcs
Charging period	4-6 hours recover to 90% capacity					
<b>PROTECTION</b>						
Full protection	Low voltage & overload & short circuit protection					
<b>PHYSICAL</b>						
Net weight(kg)	3.9	4.3	7	9	11	20
Unit dimension(mm)	284*95*140		345*146*162		345*122*192	
412*145*210						
<b>ENVIRONMENT</b>						
Environment of performance	Temperature 0°C~40°C, Humidity 20%~90%					
Noise level	Less than 40dB					
<b>MANAGEMENT</b>						
LCD or LED, RJ45/11 & USB	Optional					

Product specifications are subject to change without notice

## REAR PANEL

