


Unmanaged Switch | Datasheet

TL-SG1005P V5

5-Port Gigabit Desktop Switch with 4-Port PoE+

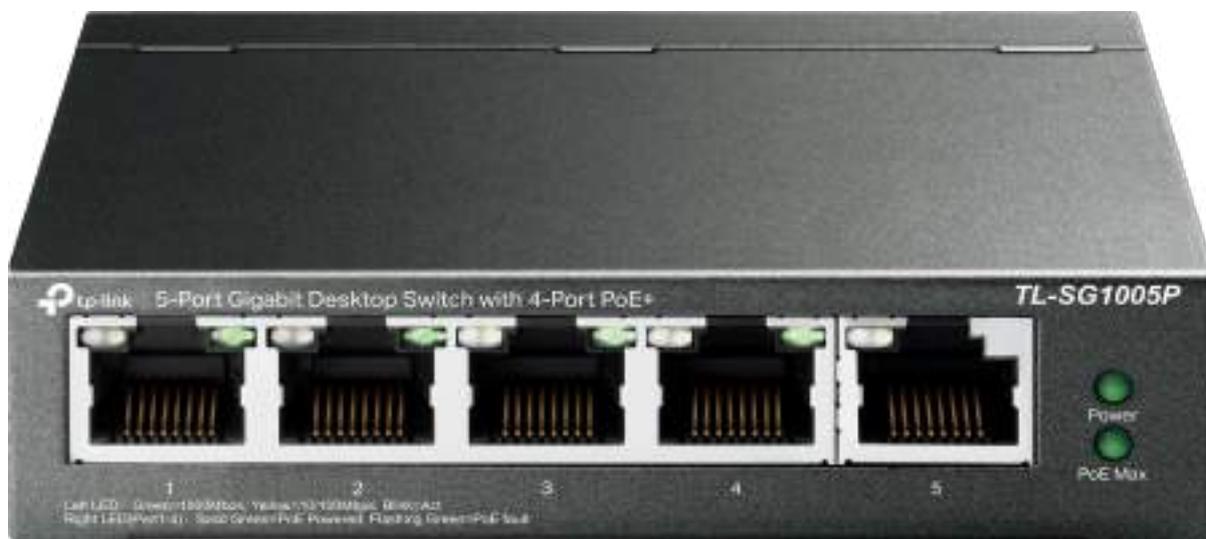

Highlights

- 5× 10/100/1000 Mbps RJ45 ports
- With four PoE+ ports, transfers data and power on one single cable
- Works with IEEE 802.3af/at compliant PDs
- 802.1p/DSCP QoS enable smooth latency-sensitive traffic
- Supports PoE Power up to 30 W for each PoE port
- Supports PoE Power up to 65 W for all PoE ports*
- Up to 250m data and power transmitting range under Extend Mode**
- PoE Auto Recovery guarantees stable operation of PoE devices by automatically rebooting the dropped or unresponsive PD devices
- Plug and Play, no configuration and installation required

Product Pictures



4 × Gigabit RJ45 ports with PoE+ 1 × Gigabit RJ45 port



Button for Extend Mode Button for PoE Auto Recovery

Specifications

| Model | TL-SG1005P V5 |
|------------------------|--|
| Standards | IEEE 802.3, IEEE 802.3i, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x, IEEE 802.1p, IEEE 802.3af, IEEE 802.3at |
| Interface | <ul style="list-style-type: none"> • 5*10/100/1000 Mbps RJ45 Ports with 4 PoE+ Ports (Port 1 to Port 4) • AUTO Negotiation/AUTO MDI/MDIX |
| Network Media (Cable) | <ul style="list-style-type: none"> • 10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) • 100BASE-TX: UTP category 5 or above cable (maximum 100m) • 1000BASE-T: UTP category 5e or above cable (maximum 100m) |
| Max Power Consumption | 74.54 W (220 V/50 Hz, with 65 W PD connected) |
| Max Heat Dissipation | 254.18 BTU/h (with 65 W PD connected) |
| PoE Ports (RJ45) | PoE Standard: 802.3 af/at PoE Ports: 1-4, up to 30 W per port PoE Power Budget: 65 W |
| Transmission Method | Store-And-Forward |
| Packet Forwarding Rate | 7.44 Mbps |
| Switch Capacity | 10 Gbps |
| MAC Address Table | 2K |
| Packet Buffer Capacity | 1 Mbit |

| | |
|--------------------------|---|
| Model | TL-SG1005P V5 |
| Jumbo Frame | 16 KB |
| Extend Mode | For Ports 1-2 |
| PoE Auto Recovery | For Ports 1-4 |
| Advanced Features | <ul style="list-style-type: none"> • Compatible With IEEE 802.3af/at Compliant PDs • Mac Address Auto-Learning And Auto-Aging • IEEE 802.3x Flow Control • 802.1p/DSCP QoS • IGMP Snooping • Green Ethernet |
| Fan Quantity | Fanless |
| External Power Supply | External Power Adapter (Output: 53.5 VDC / 1.31 A) |
| Dimensions (W x D x H) | 3.9 x 3.9 x 1.0 in. (99.8 x 98 x 25 mm) |
| Certification | FCC, CE, RoHS |
| Package Contents | Switch, Power Adapter, Installation Guide |
| Operating Temperature | 0°C to 40 °C (32 °F to 104°F) |
| Storage Temperature | -40 °C to 70 °C (-40 °F to 158°F) |
| Operating Humidity | 10% to 90% non-condensing |
| Storage Humidity | 5% to 90% non-condensing |

Disclaimers

*PoE budget calculations are based on laboratory testing. Actual PoE power budget is not guaranteed and will vary as a result of client limitations and environmental factors.

**The speed of the ports in extend mode will downgrade to 10 Mbps. The actual transmission distance may vary due to the power consumption of PoE-powered devices or the cable quality and type.

www.tp-link.com

Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. © 2025 TP-Link