

QX210R

Industrial Cellular Router

2 Eth + 1 SIM + 1 RS232 + 1 RS485 + 1 USB

INTRODUCTION

QX210R series industrial cellular router designed for Internet of Things (IoT) and Machine to Machine(M2M) applications, It provides high speed wireless network for device by wireless connection and with Ethernet, WiFi and 4G internet connection options, with auto-failover to ensure the stable connection of Wireless network.

QX210R platform equipped with high-performance industrial 32-bit Communications Processor, two Ethernet ports, dedicated serial ports (RS232 and RS485), Wi-Fi interface, embedded LEDE Linux Operating System. With the small, compact design and Din Rail Mounting Kit, it is ideal for space-constrained applications such as Charging Station, ATM, POS, Vending Machine, Bus WiFi, Smart Parcel Locker, Fleet Tracking, CCTV camera, Access Control, etc.



KEY FEATURES

Industrial-grade Design

- High-performance industrial wireless module
- High-performance industrial 32-bit processor
- Support low-consumption mode, scheduled reboot mode
- Metal housing, excellent heat dissipation
- Desktop, Wall mount, and Din Rail Mount, Protection degree IP41(Max IP51)
- Wide voltage:5V~36V DC

Stable and Reliable

- Hardware and Software WDT and multi-link detection make it self-recovery from unexpected failure, guarantee reliable communication
- Port ESD protection, avoid Static Electricity Shock
- LED indicators display the status of Wireless network signal

Network Characteristics

- Port flux detection
- Link real-time monitoring
- Support APN and VPDN private network access
- Multiple VPN protocols (**Client Modes**): PPTP, L2TP
- Serial port offer Data Transfer Unit(DUT) function and support Modbus protocol
- Support multi online trigger ways
- Support QOS, UPnP protocol
- Port forwarding
- UDP broadcast relay

Function Characteristics

- Full bands 4G LTE, compatible with 3G/2G WCDMA GPRS, EDGE
- Failover, Backup and Load balance between Wired WAN, WiFi and Cellular network
- Various interface: 1xWAN+1xLAN or 2xLAN, RS232 and RS485 serial ports, Type C USB port
- Wi-Fi radios, support IEEE802.11b/g/n
- Always keep online, reboot automatically when internet break down to ensure

- continual connection
- Support SNMP management protocol
- Support DHCP, DDNS, Firewall, NAT, and DMZ host
- Support ICMP, TCP, UDP, FTP, HTTP, HTTPS protocol
- Support standard industrial grade SIM/UIM card
- Support scheduled reboot

Cloud-Based Platform Management


- Remote parameter configuration
- Remote parameter backup
- Remote reboot and log query
- Remote device upgrades
- On-line monitoring

Extensions

- Support GPS positioning (Optional)
- Support WAN port, wired and wireless mutual backup (Optional)
- WiFi advertising (Optional)

APPLICATION

Retail	ATM, POS(Point-of-Sale), Vending Machine, Lottery Machine, Branch network, Digital Signage
Transportation	Wi-Fi on Board(Bus, Yacht, Train), Vehicle video surveillance, Fleet tracking, Bus Advertising
Energy	Digital Oil Field, Coal Mine, Solar, Smart Grid
Smart City	Charging station, Water conservancy, Traffic, Street lighting, Security monitoring equipment, Guest and employee Wi-Fi, Environment monitoring, Video Surveillance, Smart Parcel Locker, Building and process automation controllers, IP cameras and access controllers
Industry & Enterprise	Telco infrastructure controllers, Automation controllers, Remote PLC, Remote AMR, Remote Monitoring and control, Remote data loggers, flow meters and sensing equipment (Telemetry, Tanking, Fire alarm, Meteorological monitoring), remote offices

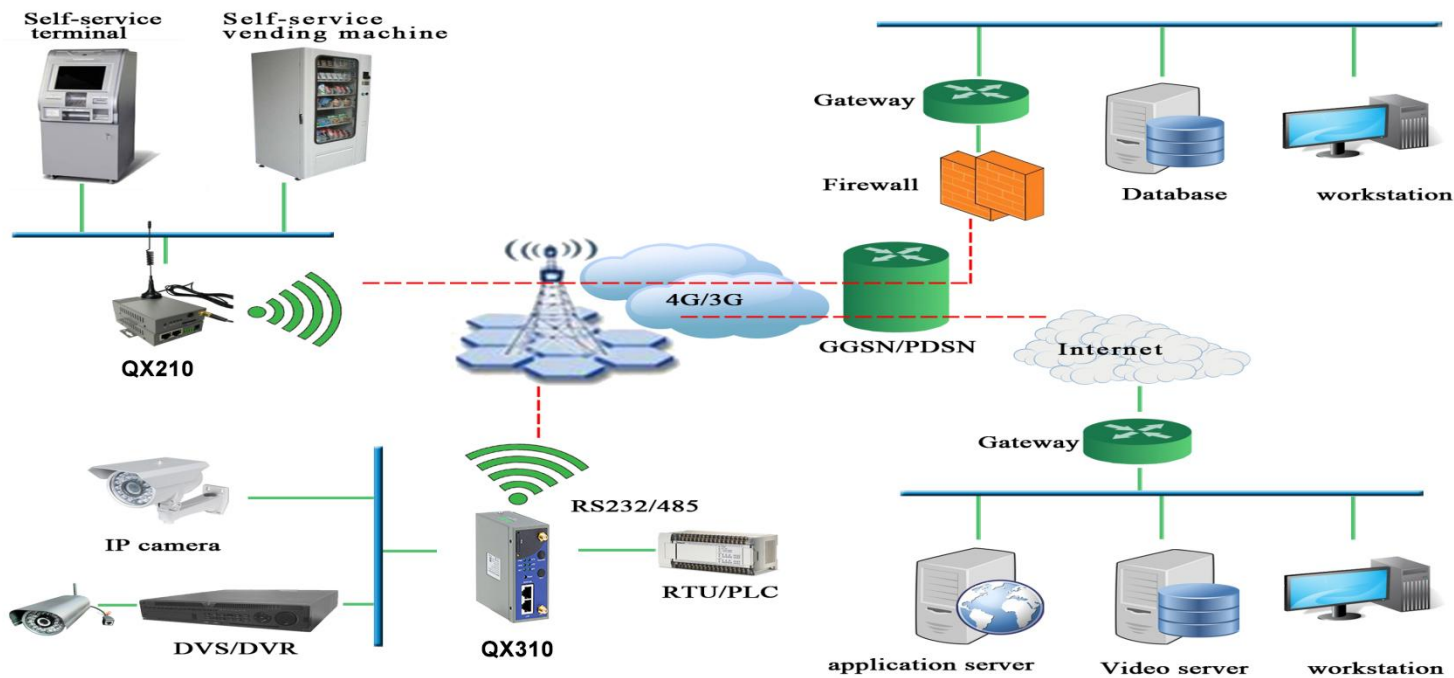

QX210R MODEL ORDERING INFORMATION (Model: QX210R)

Part Number	Cellular Bands		Region	Wi-Fi	GPS
QX210R-N	FDD-LTE:B2/4/5/12/13/17/18/25/26		North America		
QX210R-NW	TDD-LTE:B41			√	
QX210R-NG	WCDMA:B2/4/5				√
QX210R-NWG	EVDO:BC0/1 ; GSM:850/1900			√	√
QX210R-E	EC25-EUX Module:	SLM750-VE Module:	Europe,Middle East, Africa,Korea, Thailand,Southeast Asia		
QX210R-EW	FDD-LTE:B1/3/7/8/20/28A	FDD-LTE:B1/3/5/7/8/20		√	
QX210R-EG	TDD-LTE:B38/40/41	TDD-LTE:B40			√
QX210R-EWG	WCDMA:B1/8; GSM:B3/8	WCDMA:B1/5/8; GSM:900/1800		√	√
QX210R-A	FDD-LTE:B2/4/5/7/8/28		South America		
QX210R-AW	TDD-LTE:B40			√	
QX210R-AG	WCDMA:B2/5/8				√
QX210R-AWG	GSM:850/900/1800/1900			√	√
QX210R-AU	FDD-LTE:B1/3/5/7/8/28		Australia,New Zealand,Taiwan,Brazil		
QX210R-AUW	TDD-LTE:B40			√	
QX210R-AUG	WCDMA:B1/5/8				√
QX210R-AUWG	GSM:850/900/1800/1900			√	√
Note:					
1. If request other frequency band model, please consult sale person					
2. If request other optional features, please specify when ordering					