


Huawei NetEngine AR700 Series Enterprise Router



Huawei NetEngine AR700 series routers are next-generation high-performance routers. They use ARM-based multi-core processors and a non-blocking switching architecture, providing twice the industry average performance. Additionally, they integrate diverse functions such as routing, switching, VPN, security, and MPLS, enabling diversified enterprise services in the cloud era.

1

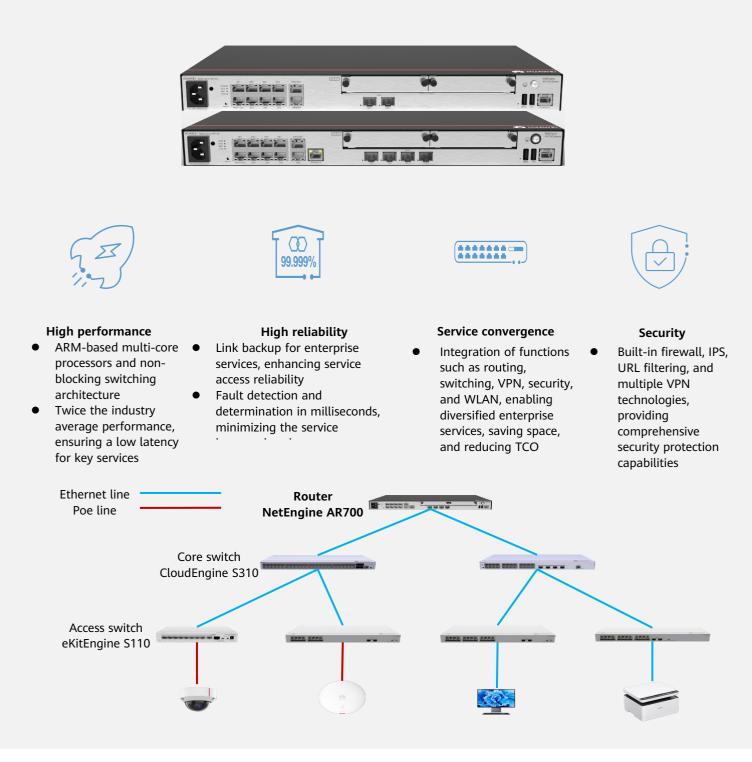

Features and Benefits

| Architecture | Highlights | of Huawei | NetEngine | AR700 | Series | Routers |
|--------------|------------|-----------|-----------|-------|--------|---------|
| | | | | | | |

| Architecture | Benefits |
|-------------------------------------|--|
| Multi-core processor | High-performance multi-core processor, supporting high-speed WAN connections, providing powerful route computing capabilities, and improving L4–L7 service processing efficiency |
| Non-blocking switching architecture | Maximum bus bandwidth of a single slot: 10 Gbit/s, eliminating service forwarding bottlenecks |

Product Specifications

| Specification | NetEngine AR720 | NetEngine AR730 |
|---|--|---|
| Processor | ARM64 4-core | ARM64 4-core |
| Forwarding performance | 9 Mpps to 25 Mpps | 9 Mpps to 25 Mpps |
| Number of connected terminals | 700 | 1200 |
| Outbound bandwidth | 4 Gbit/s | 6 Gbit/s |
| Fixed WAN ports | 2*GE combo ports | 2 x GE combo ports, 1 x 10GE optical port (compatible with GE optical) |
| Fixed LAN ports | 8 x GE electrical ports (can be switched to WAN ports) | 1*GE combo port, 8 x GE electrical ports (can be switched to WAN ports) |
| Serial auxiliary or console port | 1 x RJ45 console serial port | 1 x RJ45 console serial port |
| USB ports | 2 x USB ports | 2 x USB ports |
| Memory | 4 GB | 4 GB |
| Flash*** | 1 GB | 1 GB |
| Dimensions excluding the parts protruding from the body (H x W x D) | 44.4 mm x 442.0 mm x 220.4 mm | 44.4 mm x 442.0 mm x 220.4 mm |
| Dimensions with the parts protruding from the body (H x W x D) | 44.4 mm x 442.0 mm x 225.2 mm | 44.4 mm x 442.0 mm x 225.2 mm |
| Dimensions of the packing box (H x W x D) | 90 mm x 570 mm x 390 mm | 90 mm x 570 mm x 390 mm |
| Weight (unconfigured) | 3.2 kg | 3.2 kg |
| Rack installation | IEC | IEC |
| Required space in a rack | 1 U | 1 U |

| Specification | NetEngine AR720 | NetEngine AR730 |
|-------------------------------|---------------------------------|---------------------------------|
| Rated input voltage (AC) | 100 V to 240 V | 100 V to 240 V |
| Rated input frequency (AC) | 50 Hz/60 Hz | 50 Hz/60 Hz |
| Maximum input voltage (AC) | 90 V to 264 V | 90 V to 264 V |
| Maximum input current (AC) | 2 A | 2 A |
| Maximum output power (AC) | 70 W | 70 W |
| Maximum power consumption | 33 W | 33 W |
| Fan module | Built-in unpluggable fan module | Built-in unpluggable fan module |
| Airflow | Left to right | Left to right |
| Noise | 52.3 dB | 52.3dB |
| Operating temperature | 0°C to 45°C | 0°C to 45°C |
| Operating humidity | 5% to 95% (non-condensing) | 5% to 95% (non-condensing) |
| Operating altitude | < 5000 m | < 5000 m |
| Storage temperature | -40°C to +70°C | -40°C to +70°C |
| Storage altitude | < 5000 m | < 5000 m |

***Although the flash memory is 1 GB, but the size that customers can use is 512 MB.

| Specification | NetEngine AR700 series |
|----------------------|--|
| Basic functions | DHCP server/client/relay, PPPoE server/client, NAT, and sub-interface management |
| LAN | IEEE 802.1p, IEEE 802.1Q, IEEE 802.3, VLAN management, VLAN aggregation, MAC address management, STP, etc. |
| WLAN (AC) | AP management (AC discovery, AP access, and AP management), CAPWAP protocol, WLAN user management, WLAN radio management (802.11a/b/g/n/ac), WLAN QoS (WMM), and WLAN security (WEP/WPA/WPA2/key management) |
| IPv4 unicast routing | Routing policy, static route, RIP, OSPF, IS-IS, and BGP |
| IPv6 unicast routing | Static route, routing policy, RIPng, OSPFv3, IS-ISv6, and BGP4+ |
| Basic IPv6 functions | IPv6 ND, IPv6 PMTU, IPv6 FIB, IPv6 ACL, ICMPv6, DNSv6, and DHCPv6 |
| IPv6 tunneling | Manual tunnel, automatic tunnel, GRE tunnel, 6over4 tunnel, 6to4 tunnel, and ISATAP |
| Multicast | IGMPv1, IGMPv2, IGMPv3, PIM SM, PIM DM, MSDP, MBGP, IPv6 PIM, and MLD |
| MPLS | LDP, MPLS L3 VPN, VLL, PWE3, static LSP, dynamic LSP, MPLS TE, IP FRR, LDP FRR, and TE FRR |
| VPN | IPSec VPN, GRE VPN, DSVPN, A2A VPN, L2TP VPN, and L2TPv3 VPN |

Software Features and Protocols

| Specification | NetEngine AR700 series |
|----------------------------|--|
| QoS | DiffServ mode, MPLS QoS, priority mapping, traffic policing (CAR), traffic shaping, congestion avoidance, congestion management, HQoS, MQC (traffic classifier, traffic behavior, and traffic policy), hierarchical QoS, and smart application control (SAC) |
| WAN optimization | Multi-fed and selective receiving, per-packet load balancing |
| Security | ACLv4/v6, domain-based stateful firewall, 802.1X authentication, MAC address authentication, Portal authentication, AAA, RADIUS, HWTACACS, PKI, broadcast storm suppression, ARP security, ICMP attack defense, URPF, CPCAR, blacklist, attack source tracing, online behavior management, IPS, and URL filtering |
| Management and maintenance | Upgrade management, device management, web system, GTL, SNMP (v1/v2c/v3), RMON, NTP, CWMP, Auto-Config, email/USB/DHCP-based deployment, NETCONF/YANG, CLI, NetStream, TWAMP, IP FPM, TCP FPM, IP accounting, and NQA |

Safety and Regulatory Standards

| Specification | NetEngine AR700 series |
|-----------------------------|-------------------------------|
| EMC standards compliance | CISPR32 Class A |
| | • EN 55032 Class A |
| | • CISPR24 |
| | • EN 55024 |
| | • ETSI EN 300 386 |
| | AS/NZS CISPR32 Class A |
| | FCC Part 15 Subpart B Class A |
| | ICES 003 Class A |
| | • IEC 61000-3-2 |
| | • EN 61000-3-2 |
| | • IEC 61000-3-3 |
| | • EN 61000-3-3 |
| | • GB 9254 |
| | VCCI-CISPR32 Class A |
| Environmental standards | • RoHS |
| | • REACH |
| | • WEEE |
| Safety standards | • IEC 60950-1 |
| | • EN 60950-1 |
| | • UL 60950-1 |
| | • CSA C22.2 No 60950-1 |
| | • GB 4943.1 |

More Information

For more information, visit https://e.huawei.com/en/ or contact us in the following ways:

- Global service hotline: https://e.huawei.com/en/service-hotline-query
- Logging in to the Huawei Enterprise technical support website: https://support.huawei.com/enterprise/en/index.html
- Sending an email to the customer service mailbox: Support_e@huawei.com

Copyright © Huawei Technologies Co., Ltd. 2023. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior writtenconsent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

W HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd. All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of anykind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd. Address: Huawei Industrial Base Bantian,Longgang Shenzhen 518129 People's Republic of China Website: www.huawei.com