

## Rack-Mounted GPON OLT FD1608S-B0



### Product Overview

GPON OLT FD1608S-B0 completely meet relative standard of ITU G.984.x and FSAN, which is 1U rack-mounted device with 1 USB interface, 4 uplink GE ports, 4 uplink SFP ports, 2 10-gigabit uplink ports and 8 GPON ports, each GPON port supports the splitting ratio of 1:128 and provides downstream bandwidth of 2.5Gbps and upstream bandwidth of 1.25Gbps, system support 1024 GPON terminals accessing in for the most.

This product meets the requirements in device performance and size of compact server room as the product has high performance and compact size, is convenient and flexible to use, and is easy to deploy as well. Moreover, the product meets the requirements of promoting network performance, improving reliability and reducing power consumption in the perspective of access network and enterprise network and is applicable to three-in-one broadcast television network, FTTP (Fiber to the premise), video monitoring network, enterprise LAN (Local Area Network), internet of things and other network applications with a very high price/performance ratio.

### Features

- **Meet ITU-T G.984/G.988 standard and relative GPON standards of Chinese Communication Industry**
- **Support OMCI remote management for ONT/ONU, compatible with ITU-T G.984.4/G.988 OMCI Protocol**
- **1U height 8PON OLT product in compact design of Pizza-Box**
- **Complete PON protection switching function**
- **Layer 2 Switching Function**

OLT equips with very powerful layer 2 Full Wire Speed Switching and completely supports layer 2 protocol. OLT supports varieties of layer 2 functions like TRUNK, VLAN, LACP, rate limit, port isolate, queue technology, flow control technology, ACL and so on, which provides technical guarantee for the development of multi-service integrated.

- **QOS Guarantee**  
GPON Products maintains fully-improved DBA with excellent Qos service capabilities. DBA meets different Qos requirements from different service flow in latency, jitter, packet loss rate.
- **Easy-to-Use Management System**  
Support management method of CLI, WEB, SNMP, TELNET, SSH and meet OMCI standard, through OMCI


channel protocol service management can be realized, including ONT function parameter set, T-CONT business lines and amount, Qos parameters, configuration information request, performance statistics, auto-reporting of running events in system, configuration for ONT from OLT, fault diagnosis and management of performance and safety.

## Product Specification

Item		FD1608S-B0	
Management Rack	Type	1U 19-inch standard box	
Uplink Port	COMBO port	4 10/100/1000M auto-negotiation Ethernet ports	
		4 SFP interfaces	
PON Port	10-Gigabit	2 SFP+ interfaces	
	Quantity	8	
	Physical interface	SFP slot	
	Interface type	ITU-TG.984.2 Class B+/Class C+	
	Max splitting ratio	1:128	
Management Port		1 100/1000BASE-Tx out-band Ethernet port 1 CONSOLE local management port	
USB Port		1 USB interface (It's used to backup configuration, upgrade program, and record log information)	
PON Port attribute	Transmission distance	20KM	
	Port rate	Downstream: 2.5Gbps	Upstream: 1.25Gbps
	Wavelength	Forwarding: 1490nm	Receiving: 1310nm
	Interface type	SC/UPC	
	Fiber type	9/125μm SMF (Single Mode Fiber)	
	Light transmission power	Class B+ +1.5~+5dBm	Class C+ +3~+7dBm
	Receiving sensitivity	Class B+ -28dBm	Class C+ -30dBm
	Saturation power	Class B+ -8dBm	Class C+ -12dBm
Network management method		Support CLI、SNMP、TELNET、SSH、WEB	
Business capabilities		<ul style="list-style-type: none"> <li>➤ Support device log, device upgrade, device management, condition monitoring, configuration management, and user management.</li> <li>➤ Layer 2 switching configuration management: Like port management, VLAN, RSTP, IGMP, ACL, QOS and so on.</li> <li>➤ PON function configuration management: Like OLT authentication, DBA template, service template, line template and so on.</li> <li>➤ Layer 3 function: support static routing, dhcp-relay and vlanif configuration</li> </ul>	
Backplane Bandwidth		78G	

Size		440mm(L)*272.6mm(W)*44mm(H)
Weight		4.50kg
Power supply	220VAC	AC: 100V~240V, 47/63Hz
	-48DC	DC:-36V~-72V
	BBU	AC: 11V~14V Function: When the regular power supply is cut off, it can be switched to the backup power supply, and when the regular power supply resumes, it will switch back to the regular power supply and charge the backup power supply.
Maximum power		58W
Working environment	Working temperature	-15~50°C
	Storage temperature	-40~85°C
	Relative humidity	5~90% (Non-condensing)

### Typical Application

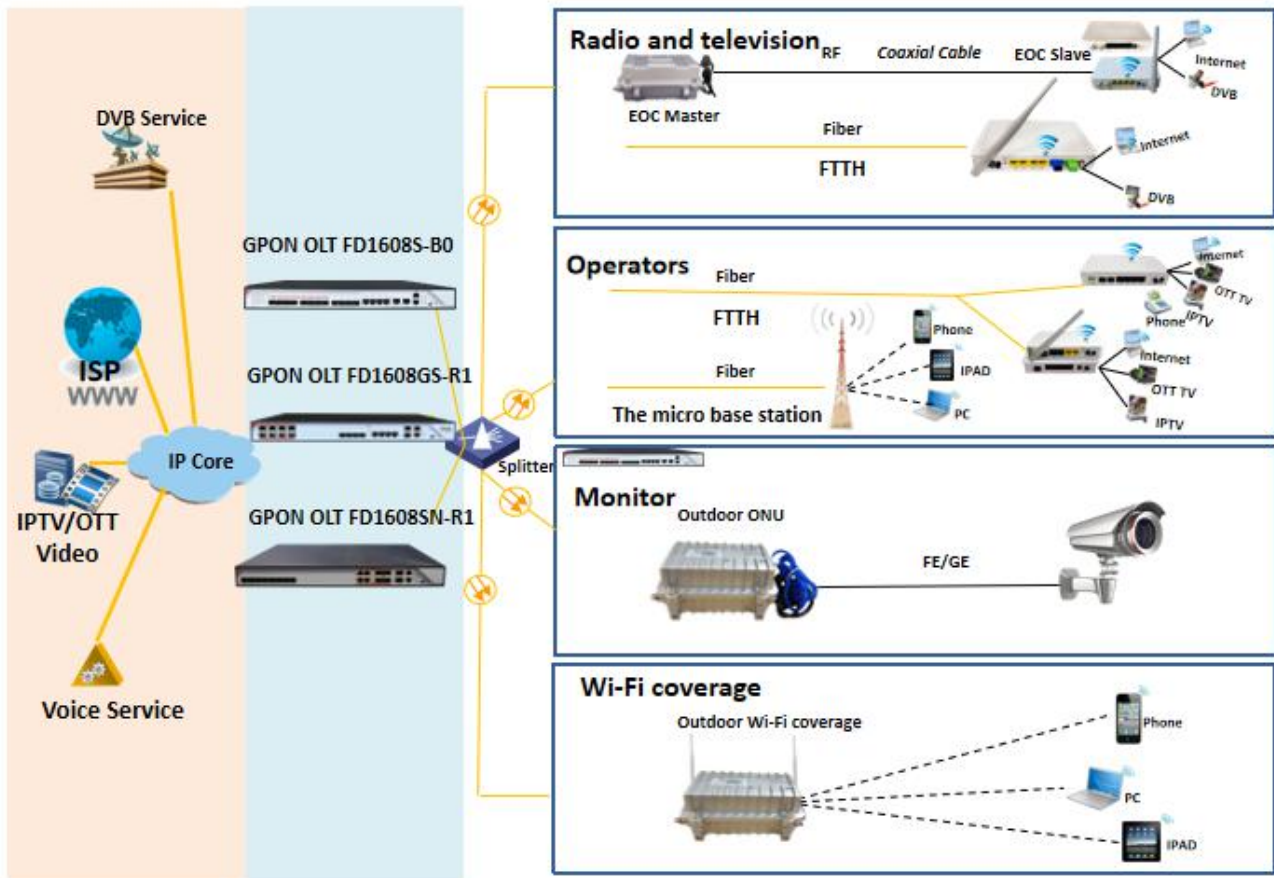

## Ordering Information

Product Name	Model	Product Description
Standalone OLT	FD1608S-B0-①② Example:FD1608S-B0-NDA	1 U standalone GPON OLT with 8 PON ports, 1 USB interface,4 uplink COMBO ports, 2 uplink 10-gigabit optical ports and power supply of 220VAC / -48VDC, support dual power redundancy configuration. ①:BBU key. N-without BBU; B-with BBU ②:Power key. SA-single AC; DA-double AC; SD-single DC; DD-double DC; DX-single AC and single DC
Ethernet SFP Optical Module	AS60-EG33200-CPLD	20KM twin-fiber type
	AS60-EG35400-CPSS AS60-EG53400-CPSS	40KM single fiber type
Ethernet SFP+ Optical Module	AS60-EQ33101-CPLD	10KM twin-fiber type
OLT SFP Optical Module	AS60-PG43205-CPUS	ITU-TG.984.2 Class B+
	AS60-PG43206-CPUS	ITU-TG.984.2 Class C+