

Multi Port Passive PoE Injector

ZQPOEI008

FEATURES


- Use with any ethernet switch
- Flexible power(DC 12V TO 56V)
- 10/100Mbps fast ethernet
- Ideal for IP Cameras, VOIP, WiFi
- 8 Port Injector(8 Lan&8 Lan+PoE port)



OVERVIEW

The ZQPOEI008 passive PoE Injector is used 10/100M Ethernet, The LAN rj45 sockets is form "Switch/PC/HUB" 1/2&3/6 are transmitting data .The POE rj45(power+data) socket is to deliver data and power . Pin 1/2 & 3/6 transmitting data, Pin 4/5(+)&7/8(-)for power. Passive PoE is composed of 8 set of Rj45 sockets and one 60V DC power jack. Input power requests 60W or more Ac To Dc Power converter.The input dc hole diameter is 2.1mm and the other end OD id is 5.5mm.

The sum total output power must be lower than the Max input power of AC-DC power converter. If not, it is necessary to consider taking higher AC-DC power converter. There commended formula for AC-DC power converter is : 10W per RJ45 set (1 set = 2 x Rj45 sockets). For example, 8 x 10W = 80W for 8 port Passive PoE panel .

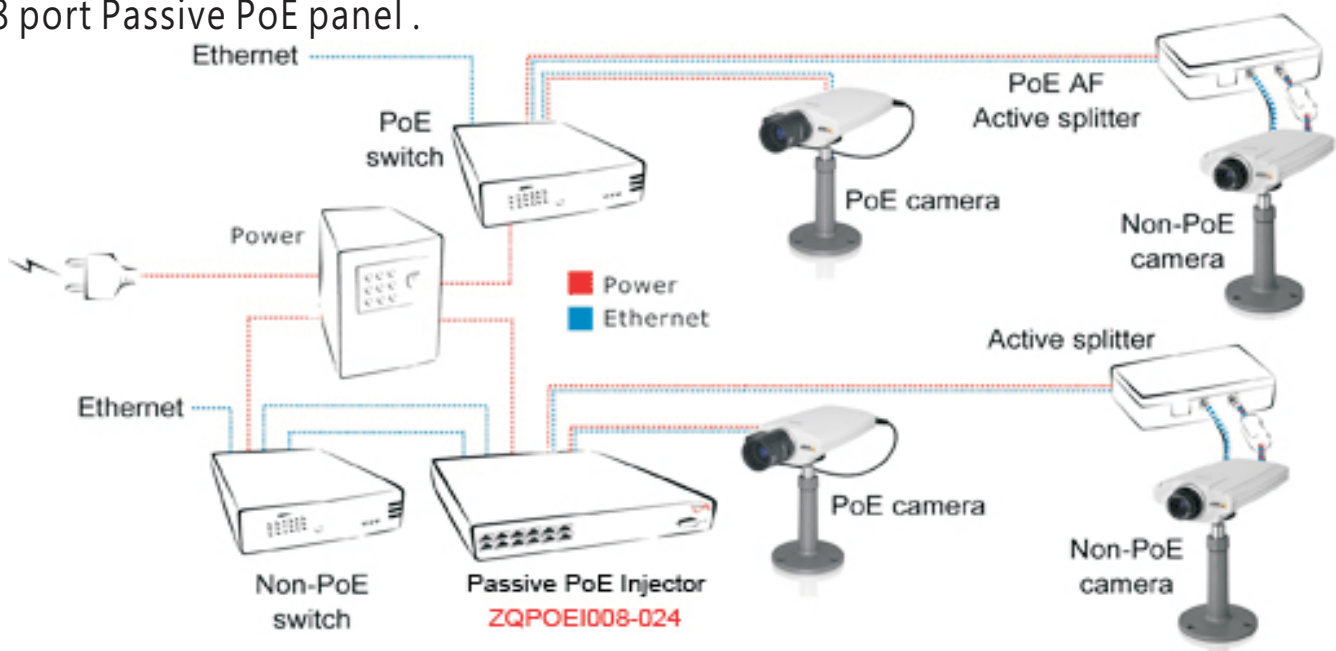

Multi Port Passive PoE Injector

ZQPOEI008

LED Indicator

POWER LED

POWER OFF -- Off 4/5 (V+),7/8 (V-) -- Green 4/5 (V-),7/8 (V+) -- Red

SPECIFICATIONS

Input : 12-56V DC 2.1MM

Output: 12-56V PER PORT(30W Max)

Data: 1/2&3/6

Power: 4/5 V+ & 7/8 V-

Data In :Connects PC/HUB/Switch

Weight : 140g

Dimensions: 175mm×37mm×20mm

Ethernet Cable : TIA/EIA 568 Cat. 5

Data rate : 10/100Mbps

Connector: RJ-45

Operating Temperature : 0°C ~ 40°C

Storage Temperature : -40°C ~ +70°C

Operating Humidity : 10%~80%RH

Storage Humidity :5%~90%RH

Certification: CE , FCC

HOWTOORDER

ZQPOEI008 8 PORT POE Panel 4/5+,7/8-